


# COLORdash™ Accent Quad

## User Manual

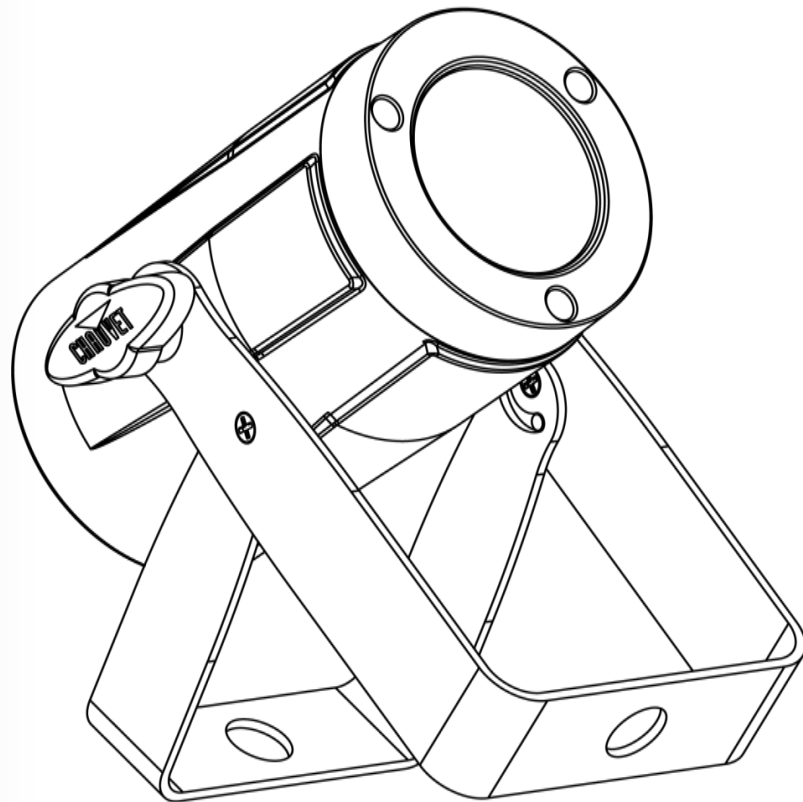

  
**CHAUVET®**  
**PROFESSIONAL**

**Edition Notes** The COLORdash™ Accent Quad User Manual Rev. 2 covers the description, safety precautions, installation, programming, operation, and maintenance of the COLORdash™ Accent Quad. Chauvet released this edition of the COLORdash™ Accent Quad User Manual in April 2015.

**Trademarks** CHAUVET® is a registered trademark of CHAUVET & Sons Inc. (d/b/a CHAUVET® or Chauvet). The CHAUVET® logo in its entirety including the CHAUVET® name and the dotted triangle, and all other trademarks in this manual pertaining to services, products, or marketing statements are owned or licensed by Chauvet. Any other product names, logos, brands, company names, and other trademarks featured or referred to within this document are the property of their respective trademark holders.

**Copyright Notice** Chauvet owns the content of this User Manual in its entirety, including but not limited to pictures, logos, trademarks, and resources.

© Copyright 2015 Chauvet. All rights reserved.

Electronically published by Chauvet in the United States of America.

**Manual Use** Chauvet authorizes its customers to download and print this manual for professional information purposes only. Chauvet expressly prohibits the usage, copy, storage, distribution, modification, or printing of this manual or its content for any other purpose without written consent from Chauvet.

**Document Printing** For better results, print this document in color, on letter size paper (8.5 x 11 in), double-sided. If using A4 paper (210 x 297 mm), configure your printer to scale the content accordingly.

**Intended Audience** Any person in charge of installing, operating, and/or maintaining this product should completely read through the guide that shipped with the product, as well as this manual, before installing, operating, or maintaining this product.

**Disclaimer** Chauvet believes that the information contained in this manual is accurate in all respects. However, Chauvet assumes no responsibility for any errors or omissions in this document. Chauvet reserves the right to revise and make changes to the content of this document without obligation that Chauvet notify any person or company of such revision or changes. This does not in any way constitute a commitment by Chauvet to make such changes. Chauvet may issue a revision of this manual or a new edition to incorporate such changes.

**Document Revision** The COLORdash™ Accent Quad User Manual Rev. 2 supersedes all previous versions of this manual. Discard any older versions of this manual and replace with this version. Go to [www.chauvetprofessional.com](http://www.chauvetprofessional.com) for the latest version.

Author	Date	Editor	Date
R. Isenstadt	3/31/15	M. Trouard	4/9/15

# Table of Contents

<b>1. Before You Begin .....</b>	<b>1</b>
What Is Included .....	1
Claims .....	1
Manual Conventions .....	1
Symbols .....	1
Product At A Glance .....	2
Safety Notes .....	2
Personal Safety.....	2
Mounting And Rigging.....	2
Power And Wiring .....	2
Operation .....	2
Expected LED Lifespan .....	2
<b>2. Introduction .....</b>	<b>3</b>
Description .....	3
Features.....	3
Overview .....	4
Dimensions .....	5
<b>3. Setup.....</b>	<b>6</b>
AC Power.....	6
AC Plug.....	6
DMX Linking.....	6
DMX Personalities.....	6
Master/Slave Connectivity.....	6
Mounting .....	7
Orientation .....	7
Rigging.....	7
Procedure .....	7
<b>4. Operation .....</b>	<b>8</b>
Control Panel Description .....	8
Control Options .....	8
Programming .....	8
Menu Map .....	8
Menu Map (Cont.).....	9
Configuration (Standalone).....	10
Auto Programs .....	10
Master/Slave .....	10
White Balance.....	10
Static Fixed Color.....	10
Static Manual Color.....	10
Dimmer Profiles.....	11
Back Light .....	11
Auto Test.....	11
Fixture Hours/ Software Version .....	11
Configuration (DMX) .....	11
DMX Personalities.....	11
DMX Control.....	11
DMX Values .....	12
DMX Values (Cont.).....	13
<b>5. Technical Information .....</b>	<b>14</b>
Product Maintenance.....	14



**6. Technical Specifications..... 15**  
    Returns ..... 16  
**Contact Us ..... 16**

# 1. BEFORE YOU BEGIN

- What Is Included**
- COLORdash™ Accent Quad
  - Warranty Card
  - Quick Reference Guide

**Claims** Carefully unpack the product immediately and check the box to make sure all the parts are in the package and are in good condition.




If the box or the contents (the product and included accessories) appear damaged from shipping or show signs of mishandling, notify the carrier immediately, not Chauvet. Failure to report damage to the carrier immediately may invalidate your claim. In addition, keep the box and contents for inspection.

For other issues, such as missing components or parts, damage not related to shipping, or concealed damage, file a claim with Chauvet within 7 days of delivery.

## Manual Conventions

Convention	Meaning
<b>1–512</b>	A range of values in the text
<b>50/60</b>	A set of mutually exclusive values in the text
<b>&lt;SET&gt;</b>	A button on the product's control panel
<b>Settings</b>	A product function or a menu option
<b>MENU&gt;Settings</b>	A sequence of menu options
<b>1–10</b>	A range of menu values from which to choose in a menu
<b>Yes/No</b>	A set of two mutually exclusive menu options in a menu
<b>ON</b>	A unique value to be entered or selected in a menu

## Symbols

Symbols	Meaning
	Critical installation, configuration, or operation information. Failure to comply with this information may cause the product not to work, damage third-party equipment, or cause harm to the operator.
	Important installation or configuration information. Failure to comply with this information may keep the product from working.
	Useful information.



The term “DMX” used throughout this manual refers to the USITT DMX512-A digital data transmission protocol.

## Product At A Glance

Use on Dimmer	X	Auto Programs	P
Outdoor Use	X	Auto-Ranging Power Supply	P
Master/Slave	P	Replaceable Fuse/Breaker	X
DMX	P	User-Serviceable	X

## Safety Notes



Read all the following Safety Notes before working with this product. These notes include important information about the installation, usage, and maintenance of this product.

**This product contains no user-serviceable parts. Any reference to servicing in this User Manual will only apply to properly trained Chauvet certified technicians. Do not open the housing or attempt any repairs.**



**All applicable local codes and regulations apply to proper installation of this product.**

## Personal Safety

- Avoid direct eye exposure to the light source while the product is on.
- Always disconnect this product from its power source before servicing.
- Always connect this product to a grounded circuit to avoid the risk of electrocution.
- Do not touch this product's housing during operation because it may be very hot.
- CAUTION: When transferring product from extreme temperature environments, (e.g. cold truck to warm humid ballroom) condensation may form on the internal electronics of the product. To avoid causing a failure, allow product to fully acclimate to the surrounding environment before connecting it to power.

## Mounting And Rigging

- Mount this product in a location with adequate ventilation, at least 20 in (50 cm) from adjacent surfaces.
- This product weighs 1.8 lb (0.8 kg). Always ask for help when mounting this product to avoid personal injuries or damage to the product.
- Make sure there are no flammable materials close to this product while it is operating.

## Power And Wiring

- When hanging this product, always secure to a fastening device using a safety cable.
- Always make sure you are connecting this product to the proper voltage in accordance with the specifications in this manual or on the product's specification label.
- To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.
- Never connect this product to a dimmer pack or rheostat.
- Never disconnect this product by pulling or tugging on the power cable.

## Operation

- Do not operate this product if you see damage on the housing, lenses, or cables. Have the damaged parts replaced by an authorized technician at once.
- Do not cover the ventilation slots when operating to avoid internal overheating.
- The maximum ambient temperature is 113 °F (45 °C). Do not operate this product at a higher temperature.
- In case of a serious operating problem, stop using this product immediately!



## Expected LED Lifespan

**In the unlikely event that your Chauvet product may require service, contact Chauvet Technical Support.**


LEDs gradually decline in brightness over time, mostly because of heat. Packaged in clusters, LEDs exhibit higher operating temperatures than in ideal, single-LED conditions. For this reason, using clustered LEDs at their fullest intensity significantly reduces the LEDs' lifespan. Under normal conditions, this lifespan can be 40,000 to 50,000 hours. If extending this lifespan is vital, lower the operating temperature by improving the ventilation around the product and reducing the ambient temperature to an optimal operating range. In addition, limiting the overall projection intensity may also help to extend the LEDs' lifespan.

## 2. INTRODUCTION

**Description** The COLORdash™ Accent Quad delivers evenly mixed light into tight locations. Powered by a 10 W quad-color (RGBA) LED, this palm-sized product delivers saturated colors and pastels with a soft, even glow. The COLORdash™ Accent Quad features an OLED digital display which controls and addresses the product via DMX or in a stand-alone mode, as well as a double-bracketed yoke that can serve as a floor mount or hanging support bracket.


- Features**
- 4, 6 or 10-channel quad-color LED wash product
  - Operating modes:
    - 4-channel: RGBA
    - 6-channel: RGBA, dimmer, strobe
    - 10-channel: RGBA, dimmer, strobe, color macro/white balance, auto programs, auto speed, dimmer speed
  - Quad-color LED - red, blue, green, amber (RGBA)
  - RGBA color mixing via DMX or manually
  - Extremely compact with excellent output
  - Variable electronic dimmer (0-100%)
  - Simple and complex DMX channel profiles for programming versatility
  - Double-bracketed yoke doubles as floor stand
  - Easy to use OLED digital display
  - Built-in auto programs recalled via DMX or Master/Slave

## Overview

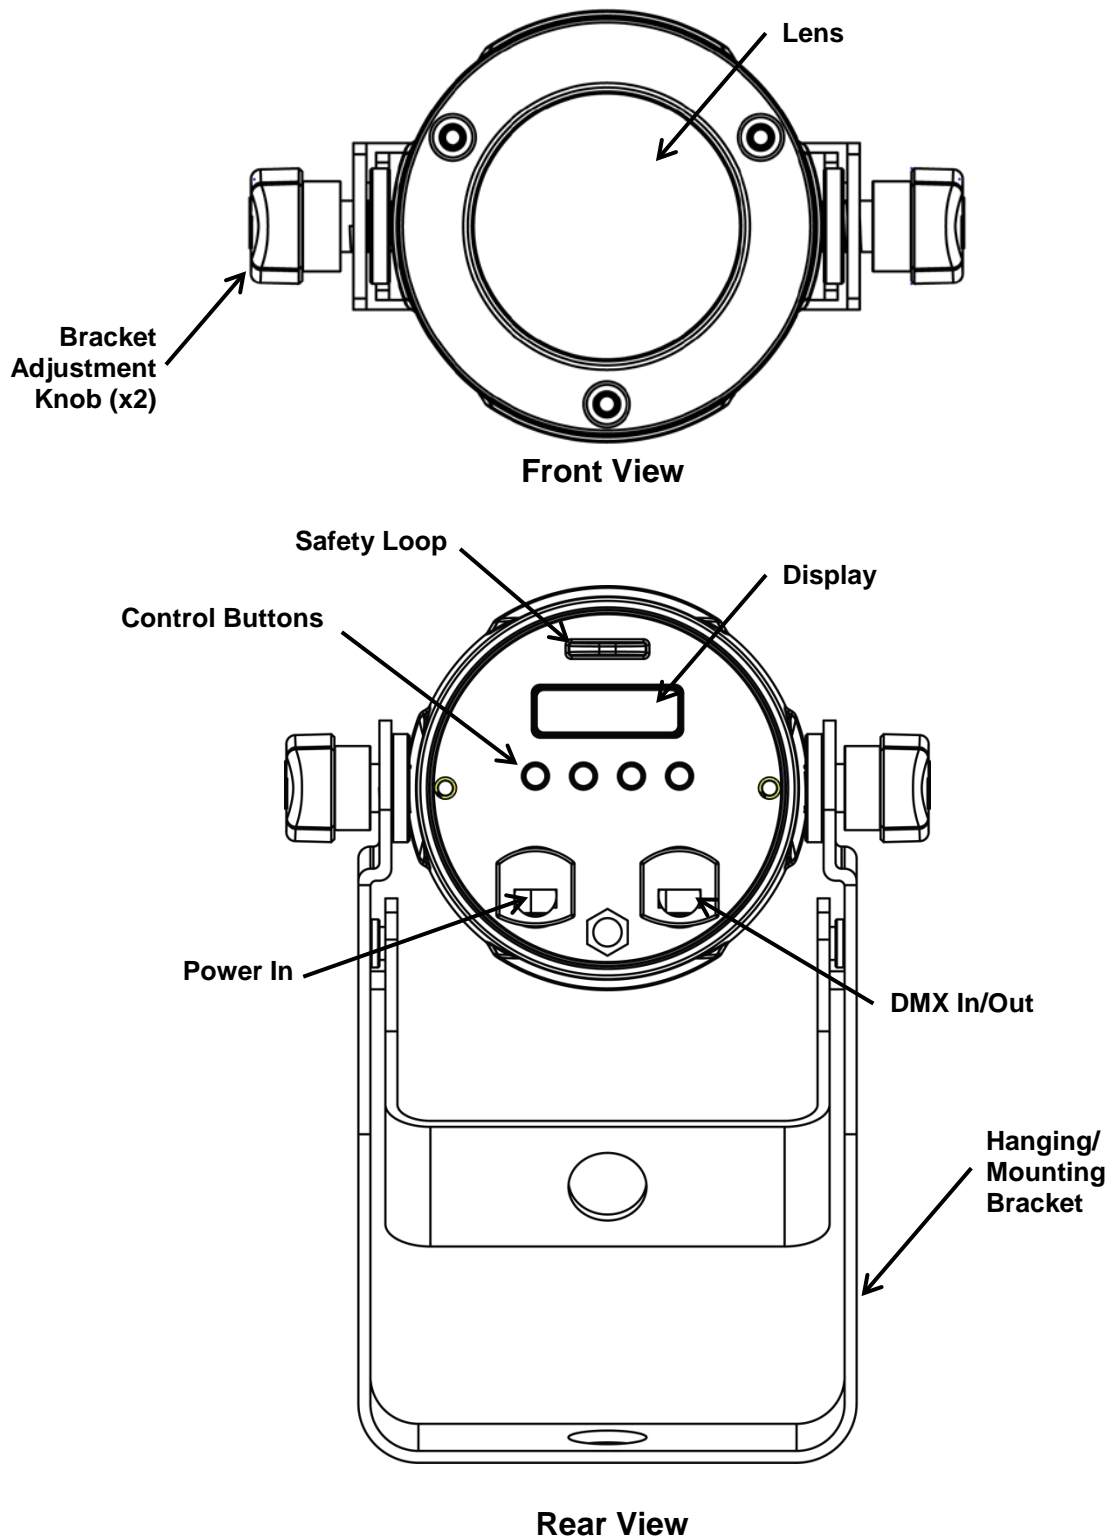



## Dimensions

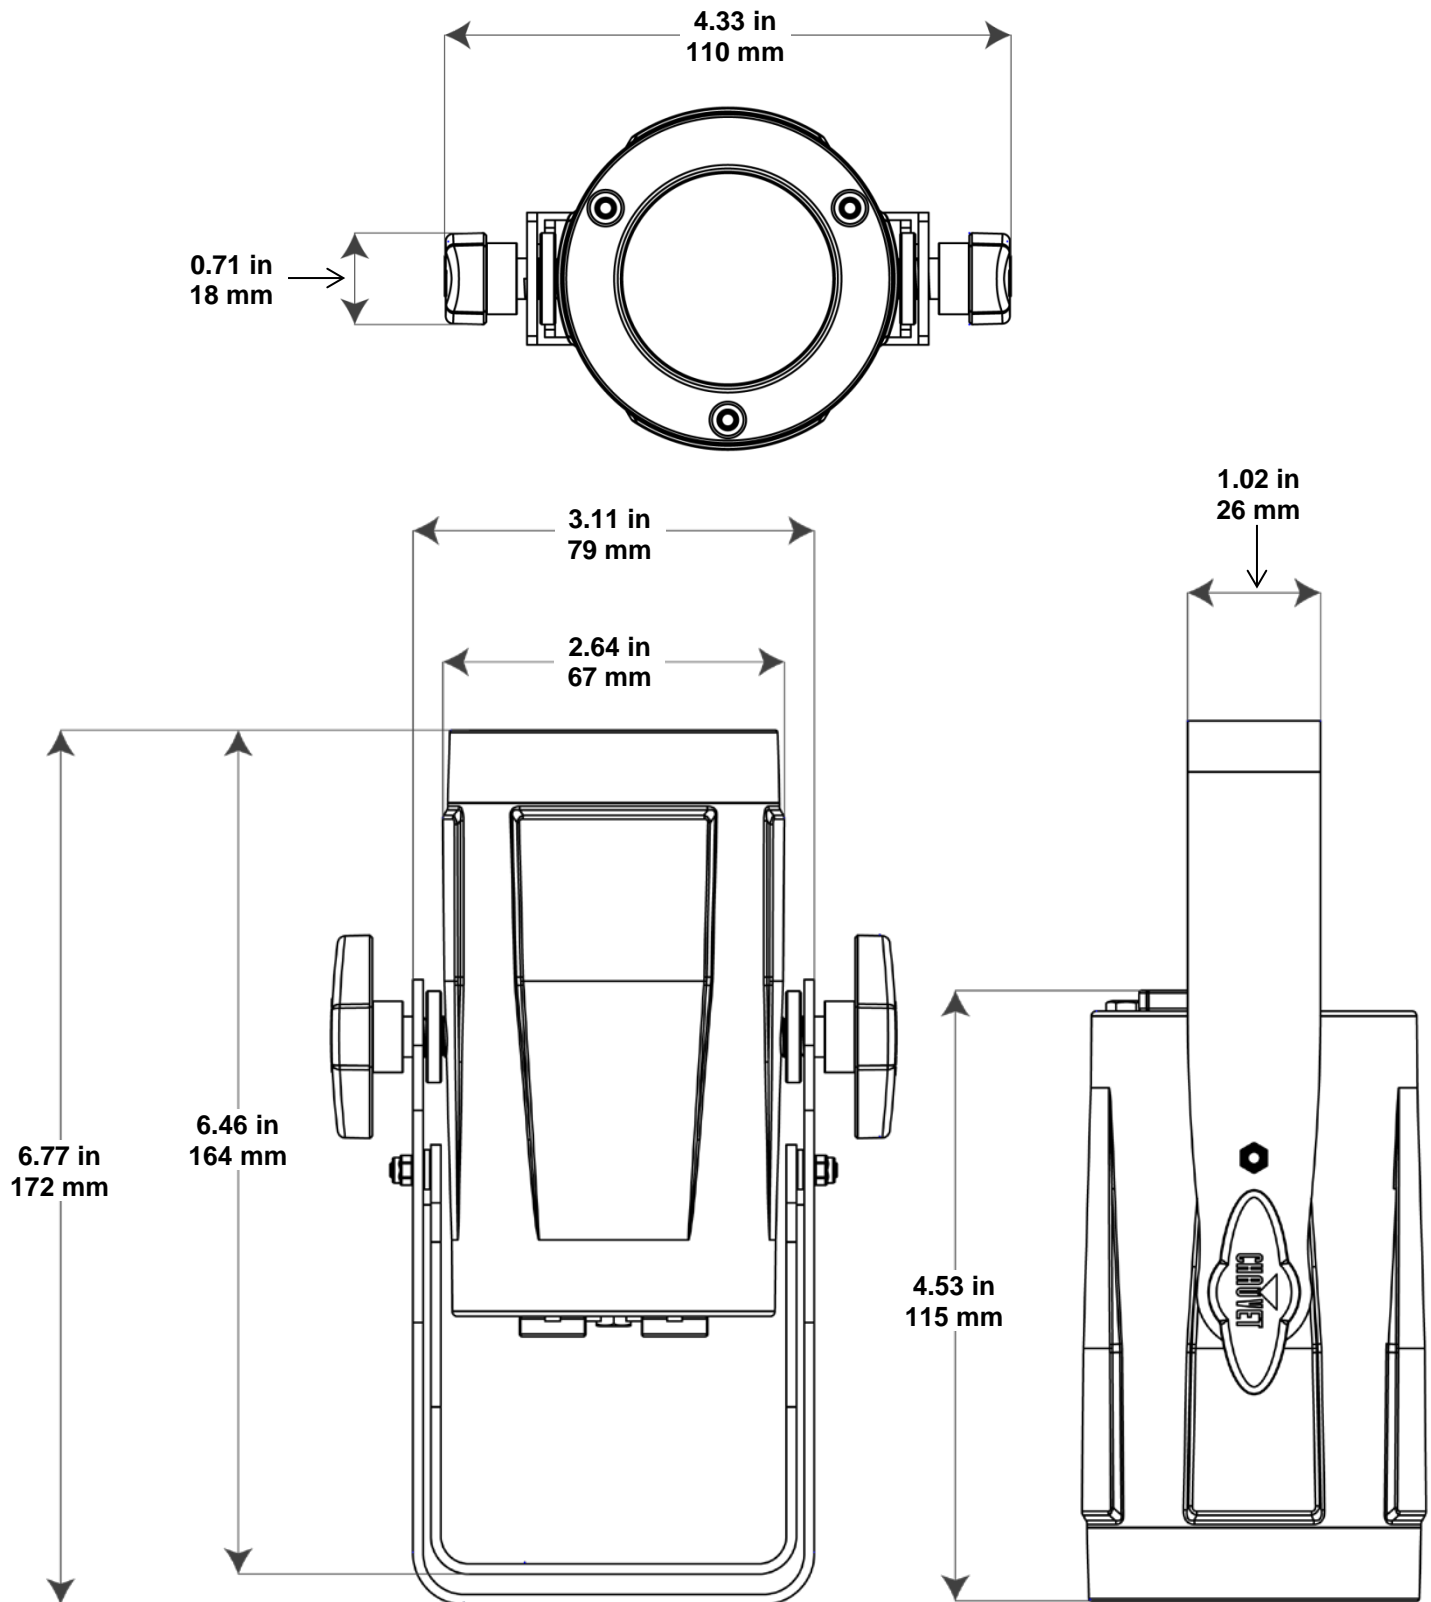

### 3. SETUP

#### AC Power

Each COLORdash™ Accent Quad has an auto-ranging power supply that works with an input voltage range of 100 to 240 VAC, 50/60 Hz. To determine the power requirements for each COLORdash™ Accent Quad, refer to the label affixed to the product. You can also refer to the [Technical Specifications](#) chart in this manual.

The listed current rating indicates the maximum current draw during normal operation. For more information, you may download Sizing Circuit Breakers from the Chauvet website: [www.chauvetprofessional.com](http://www.chauvetprofessional.com).



- **Always connect this product to a protected circuit with an appropriate electrical ground to avoid the risk of electrocution or fire.**
- **To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.**



**Never connect this product to a rheostat (variable resistor) or dimmer circuit, even if the rheostat or dimmer channel serves only as a 0 to 100% switch.**

#### AC Plug

The COLORdash™ Accent Quad comes with a power input cord terminated with an Edison plug (US market). If the power cord that came with your fixture has no plug or you need to change the Edison plug, use the table below to wire the new plug.

Connection	Wire (U.S.)	Wire (Europe)	Screw Color
AC Live	Black	Brown	Yellow or Brass
AC Neutral	White	Blue	Silver
AC Ground	Green/Yellow	Green/Yellow	Green

#### DMX Linking

You can link the COLORdash™ Accent Quad to a DMX controller using a 5-pin DMX connection. If using other DMX-compatible products with the COLORdash™ Accent Quad, you can control each individually with a single DMX controller.

#### DMX Personalities

The COLORdash™ Accent Quad uses a 5-pin DMX data connection for the 4-, 6- and 10-channel DMX personalities.

- Refer to the [Introduction](#) chapter for a brief description of each DMX personality.
- Refer to the [Operation](#) chapter to learn how to configure the COLORdash™ Accent Quad to work in these personalities.
- The [DMX Values](#) section provides you with detailed information regarding the DMX personalities.



**If you are not familiar with or need more information about DMX standards, Master/Slave connectivity, or the DMX cables needed to link this product to a DMX controller, download the DMX Primer from the Chauvet website: [www.chauvetprofessional.com](http://www.chauvetprofessional.com).**

#### Master/Slave Connectivity

The Master/Slave mode allows a COLORdash™ Accent Quad (the master) to control one or more COLORdash™ Accent Quads (the slaves) without a DMX controller. One COLORdash™ Accent Quad becomes the master when running an auto or custom program, or by being in a Static mode.

You must configure each slave's control panel to operate in Slave mode. During Master/Slave operation, the slaves will operate in unison with the master.



**DO NOT connect a DMX controller to products operating in Master/Slave mode. The DMX controller signals may interfere with the signals from the master.**



The [Operation](#) section of this manual provides detailed instructions on how to configure the master and slaves.



**If you are not familiar with or need more information about DMX standards, or the DMX cables needed to link this product to a DMX controller, download the DMX Primer from the Chauvet website: [www.chauvetprofessional.com](http://www.chauvetprofessional.com).**

**Mounting** Before mounting this product, read and follow the [Safety Notes](#). For our CHAUVET® Professional line of mounting clamps, go to <http://trusst.com/products/>.


**Orientation** Always mount this product in a safe position and make sure there is adequate room for ventilation, configuration, and maintenance.

**Rigging** Chauvet recommends using the following general guidelines when mounting this product.

- When selecting an installation location, consider easy access to this product for operation, programming adjustments, and routine maintenance.
- Make sure to mount this product away from any flammable material as indicated in the [Safety Notes](#).
- Never mount in places where rain, high humidity, extreme temperature changes, or restricted ventilation may affect the product.
- If hanging this product, make sure that the mounting location can support the product's weight. See the [Technical Specifications](#) for the weight-bearing requirements of this product.
- When hanging this product, always secure to a fastening device using a safety cable. For our CHAUVET® Professional line of safety cables, go to <http://trusst.com/products/>.

**Procedure** The COLORdash™ Accent Quad comes with a double-bracketed yoke to which you can either attach mounting clamps for hanging or simply use as a floor stand. You must supply your own mounting clamps. Make sure the clamps are capable of supporting the weight of this product. Use at least one mounting point per product. For our Chauvet line of mounting clamps, go to <http://trusst.com/products/>.

**Mounting Diagram**

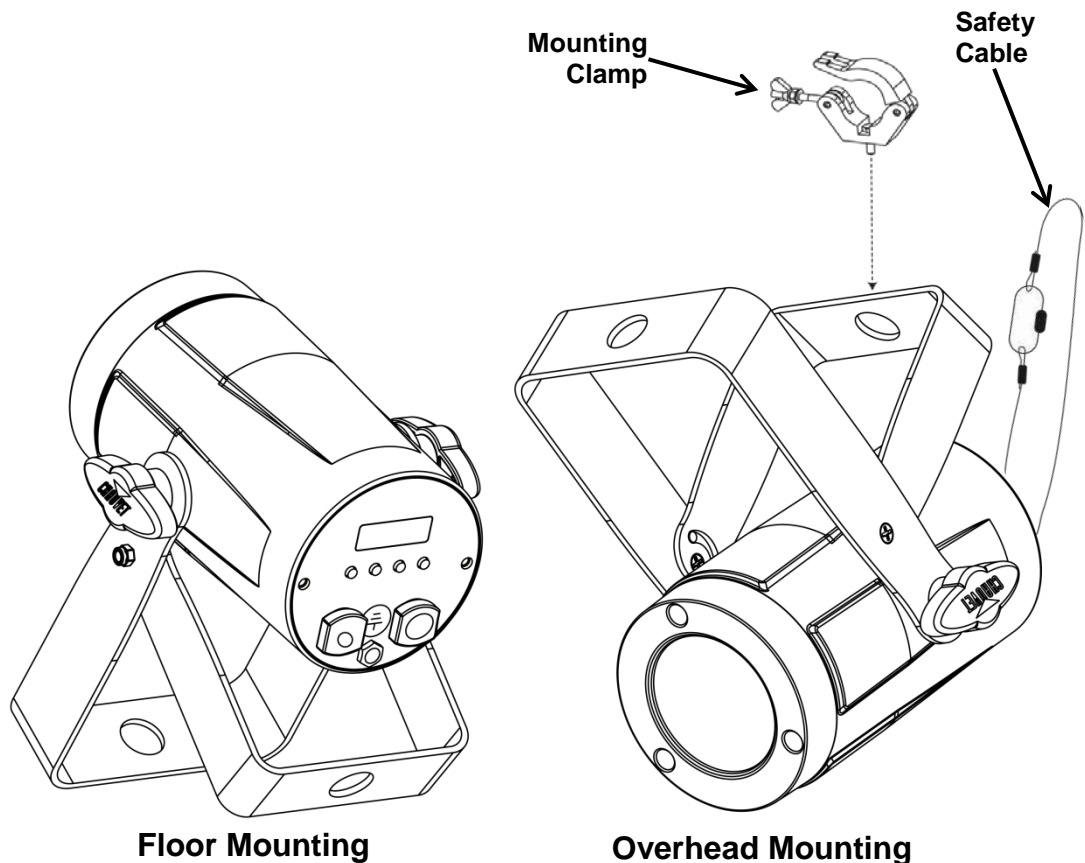

## 4. OPERATION

### Control Panel Description

Button	Function
<MENU>	Exits from the current menu or function
<ENTER>	Enables the currently displayed menu or sets the currently selected value in to the current function
<UP>	Navigates upward through the menu list or increases the numeric value when in a function
<DOWN>	Navigates downward through the menu list or decreases the numeric value when in a function

### Control Options

You can set the COLORdash™ Accent Quad starting address in the **001–512** DMX range. This enables control of up to 51 products in the 10-channel personality.

### Programming

Refer to the [Menu Map](#) to understand the menu options. The menu map shows the main level and a variable number of programming levels for each option.

- To go to the desired main level, press **<MENU>** repeatedly until the option shows on the display. Press **<ENTER>** to select. This will take you to the first programming level for that option.
- To select an option or value within the current programming level, press **<UP>** or **<DOWN>** until the option shows on the display. Press **<ENTER>** to select. In this case, if there is another programming level, you will see that first option, or you will see the selected value.
- Press **<MENU>** repeatedly to exit to the previous main level.

### Menu Map

Main Level	Programming Levels			Description
Auto Show	Auto 0–4	Speed	0–100	Automatic programs
Static	Fixed Color	R		Red
		G		Green
		B		Blue
		A		Amber
		GB		Green/Blue
		RB		Red/Blue
		RG		Red/Green
		RGB		Red/Green/Blue
		RA		Red/Amber
		GA		Green/Amber
		BA		Blue/Amber
		RGA		Red/Green/Amber
		RBA		Red/Blue/Amber
		GBA		Green/Blue/Amber
		RGBA		Red/Green/Blue/Amber
	Manual Color	R	Value	Combine red, green, blue, and amber to make a custom color (0–100%)
		G		
		B		
		A		
			0–255	

## Menu Map (Cont.)

Main Level	Programming Levels			Description
Dimmer Mode	Off			No dimmer
	Dimmer 1–3			Dimming curves <b>Dimmer 1</b> (fast) to <b>Dimmer 3</b> (slow)
Back Light	10S			Turns off display backlight after 10 sec of inactivity
	20S			Turns off display backlight after 20 sec of inactivity
	30S			Turns off display backlight after 30 sec of inactivity
	On			Display backlight always on
Information	Auto	Test		Turns on all LEDs in sequence for testing
	Fixture Hours			Shows total product hours
	Version			Shows installed software version
DMX Address	001–509			Selects DMX address (highest channel restricted to personality chosen)
DMX Channel	4 Ch			4-channel: RGBA control
	6 Ch			6-channel: RGBA control, dimmer, and strobe
	10Ch			10-channel: RGBA control, dimmer, strobe, color macro/white balance, auto programs, auto speed, dimmer speed
Master/Slave Mode	Master			DMX mode (Master)
	Slave			Slave mode
White Balance	R	Value	125–255	Sets red LED maximum value
	G			Sets green LED maximum value
	B			Sets blue LED maximum value

## Configuration (Standalone) Use standalone configuration to operate the product without a DMX controller.

### Auto Programs Auto programs allow for dynamic RGBA color mixing without a DMX controller.

1. Go to the **Auto Show** main level.
2. Select the desired auto (**Auto 0–4**).
3. Select the desired speed (**Speed 0–100**).



**You cannot edit any of the auto programs.**

### Master/Slave The Master/Slave mode allows a group of COLORdash™ Accent Quads (the slaves) to simultaneously duplicate the output of another COLORdash™ Accent Quad (the master) without a DMX controller.

1. Set each of the slaves:
  - a. Go to the **Master/Slave** main level.
  - b. Select **Slave**.
2. Set the master:
  - a. Go to the **Master/Slave** main level.
  - b. Select **Master**.
  - c. Select an auto program as explained in [Auto Programs](#), or a static mix of colors.



- **The master is the one that runs a program whether in Auto, or Static Color mode.**
- **Do not connect a DMX controller to the products configured for Master/Slave operation. The DMX controller may interfere with signals from the master.**
- **The master should be the first product in the daisy chain.**

### White Balance This setting allows for selection of the white color shown by the COLORdash™ Accent Quad when the color setting is **RGBA** and the DMX controller's red, green, and blue faders are set to **255**.

1. Go to the **White Balance** main level.
2. Select a color (**R**, **G**, or **B**).
3. Select a color value (**000–255**).
4. Repeat for the other colors.



**The values of R (red), G (green), and B (blue) configured will define the color temperature shown when the RGB faders are set to 255 if SET > COLR > RGBW is active.**

### Static Fixed Color The Static Fixed Color mode allows for permanent RGBA presets without a DMX controller.

1. Go to the **Static** main level.
2. Select **Fixed Color**.
3. Select the desired color (**R**, **G**, **B**, **A**, **GB**, **R B**, **RG**, **RGB**, **R A**, **G A**, **BA**, **RG A**, **R BA**, **GBA**, or **RGBA**).

### Static Manual Color The Static Manual Color mode allows for permanent RGBA color mixing without a DMX controller.

1. Go to the **Static** main level.
2. Select **Manual Color**.
3. Select the desired color (**R**, **G**, **B**, or **A**).
4. Select the color value (**000–255**).
5. Repeat for the other colors.

**Dimmer Profiles** This setting determines how fast the output of the COLORdash™ Accent Quad changes when you modify the values of the red, green, blue, amber, and dimmer faders. This setting provides four different options to simulate the dimming curve of an incandescent lighting product.

1. Go to the **Dimmer Mode** main level.
2. Select a dimmer curve (**OFF**, **Dimmer 1**, **Dimmer 2**, or **Dimmer 3**).



**OFF:** The output is proportional (linear) to the dimmer and RGBA channel values.

**Dimmer 1–3:** The output follows the dimmer and RGBA channel values based on the corresponding dimmer curve, **DIM1** being the fastest and **DIM4** the slowest.

**Back Light** This setting allows for selection of the amount of time the backlight on the COLORdash™ Accent Quad's display stays on after the last button is pressed on the control panel.

1. Go to the **Back Light** main level.
2. Select **On** (remains on), **10S** (10 seconds), **20S** (20 seconds), or **30S** (seconds).

**Auto Test** This setting cycles through the four colors one after the other to test the function of each color output.

1. Go to the **Information** main level.
2. Select **Auto**
3. Select **Test**.

**Fixture Hours/ Software Version** This option displays the total number of hours the fixture has run, and the installed software version.

1. Go to the **Information** main level.
2. Select **Fixture Hours** or **Version**.

**Configuration (DMX)** Use DMX configurations to operate the product with a DMX controller.

**DMX Personalities** This setting allows you to choose a particular DMX personality.

1. Go to the **DMX Channel** main level.
2. Select the desired personality (**4 Ch**, **6 Ch**, or **10Ch**).



- See the [DMX Values](#) section for the highest starting address you can select for each personality.
- Make sure that the starting addresses on the various products do not overlap due to the new personality setting.

**DMX Control** In this mode, each product will respond to a unique starting address from the DMX controller. All products with the same starting address will respond in unison.

1. Select a DMX personality as shown in [DMX Personalities](#).
2. Set the starting address:
  - a. Go to **DMX Address** main level.
  - b. Select the starting address (**001–512**).

The highest recommended starting address for each DMX mode is as follows:



DMX Personality	DMX Address
<b>10</b>	503
<b>6</b>	507
<b>4</b>	509

## DMX Values

10Ch	Channel	Function	Value	Percent/Setting
	1	Dimmer	000○ 255	0–100%
	2	Red	000○ 255	0–100%
	3	Green	000○ 255	0–100%
	4	Blue	000○ 255	0–100%)
	5	Amber	000○ 255	0–100%
	6	Strobe	000○ 010 011○ 255	No function Slow to fast
	7	Color Macro + White Balance	000○ 010 011○ 030 031○ 050 051○ 070 071○ 090 091○ 110 111○ 130 131○ 150 151○ 170 171○ 200 201○ 205 206○ 210 211○ 215 216○ 220 221○ 225 226○ 230 231○ 235 236○ 240 241○ 245 246○ 250 251○ 255	No function R: 100%    G: 0–100%    B: 0 R: 100%–0    G: 100%    B: 0 R: 0    G: 100%    B: 0–100% R: 0    G: 100%–0    B: 100% R: 0–100%    G: 0    B: 100% R: 100%    G: 0    B: 100%–0 R: 100%    G: 0–100%    B: 0–100% R: 100%–0    G: 100%–0    B: 100% R: 100%    G: 100%    B: 100%    A: 100% White 1 White 2 White 3 White 4 White 5 White 6 White 7 White 8 White 9 White 10 White 11
	8	Auto Programs	000○ 051 052○ 101 102○ 152 153○ 203 204○ 254 255	No function Auto program 1 Auto program 2 Auto program 3 Auto program 4 Auto program 0 (Auto 1–4)
	9	Auto Speed	000○ 255	Slow to fast (when channel 8 is 052–255)
	10	Dimmer Speed	000○ 051 052○ 101 102○ 152 153○ 203 204○ 255	Preset dimmer speed from display menu Dimming curve off (linear dimmer) Nonlinear dimming curve 1 (fastest) Nonlinear dimming curve 2 Nonlinear dimming curve 3 (slowest)



## DMX Values (Cont.)

6 Ch	Channel	Function	Value	Percent/Setting
	1	Dimmer	000 ó 255	No function
	2	Red	000 ó 255	0–100% (only when using <b>Auto 1–10</b> in <b>CH. 13</b> )
	3	Green	000 ó 255	Preset dimmer speed from display menu
	4	Blue	000 ó 255	0–100%
	5	Amber	000 ó 255	No function
4 Ch	6	Strobe	000 ó 010 011 ó 255	No function Slow to fast
	Channel	Function	Value	Percent/Setting
	1	Red	000 ó 255	0–100%
	2	Green	000 ó 255	0–100%
	3	Blue	000 ó 255	0–100%
	4	Amber	000 ó 255	0–100%

## 5. TECHNICAL INFORMATION

### Product Maintenance

To maintain optimum performance and minimize wear, you should clean this product frequently. Usage and environment are contributing factors in determining the cleaning frequency.

As a rule, clean this product at least twice a month. Dust build-up reduces light output performance and can cause overheating. This can lead to reduced light source life and increased mechanical wear.

To clean your product:

1. Unplug the product from power.
2. Wait until the product is at room temperature.
3. Use a vacuum (or dry compressed air) and a soft brush to remove dust collected on the external vents.
4. Clean all external surfaces with a mild solution of non-ammonia glass cleaner or isopropyl alcohol.
5. Apply the solution directly to a soft, lint-free cotton cloth or a lens cleaning tissue.
6. Wipe any dirt or grime to the outside edges of the lens surface.
7. Gently polish the lens surfaces until they are free of haze and lint.



**Always dry the external surfaces thoroughly and carefully after cleaning them.**

## 6. TECHNICAL SPECIFICATIONS

Dimensions and Weight	Length	Width	Height	Weight
	4.3 in (110 mm)	2.6 in (67 mm)	6.8 in (172 mm)	1.8 lb (0.8 kg)
Note: Dimensions in inches rounded to the nearest decimal digit.				
Power	Power Supply Type	Range	Voltage Selection	
	Switching (internal)	100–240 VAC, 50/60 Hz	Auto-ranging	
	Parameter	120 VAC, 60 Hz	230 VAC, 50 Hz	
	Consumption	14 W	13 W	
	Current	0.2 A	0.13 A	
	Power Input	U.S./Canada	Worldwide	
	Power input connector	Hard-wired	Hard-Wired	
	Power cord plug	Edison (U.S.)	Local plug	
	Light Source	Type	Power	Lifespan
LED		10 W	50,000 hours	
Color		Quantity	Current	
Quad-color RGBA		1	700 mA	
Photometrics	Parameter	Standard Optics		
	Illuminance @ 5 m	140 lux		
	Beam angle	15°		
	Field angle	29°		
Thermal	Max. External Temperature	Cooling System		
	113 °F (45 °C)	Convection		
DMX	I/O Connectors	Connector Type	Channel Range	
	5-pin XLR	Sockets	4, 6 or 10	
Ordering	Product Name	Item Code	UPC Number	
	COLORdash™ Accent Quad	03030941	781462212896	



UL 1573  
CSA C22.2 No. 166  
E113093



**Returns** You must send the product prepaid, in the original box, and with the original packing and accessories. Chauvet will not issue call tags.  
Call Chauvet and request a Return Merchandise Authorization (RMA) number before shipping the product. Be prepared to provide the model number, serial number, and a brief description of the cause(s) for the return.  
Clearly label the package with an RMA number. Chauvet will refuse any product returned without an RMA number.



**DO NOT write the RMA number directly on the box. Instead, write it on a properly affixed label.**

Once you have received the RMA number, include the following information on a piece of paper inside the box:

- Your name
- Your address
- Your phone number
- The RMA number
- A brief description of the problem(s)

Be sure to pack the product properly. Any shipping damage resulting from inadequate packaging will be the customer's responsibility. FedEx packing or double-boxing is recommended.



**Chauvet reserves the right to use its own discretion to repair or replace returned product(s).**

## CONTACT Us

### **WORLD HEADQUARTERS - Chauvet**

#### **General Information**

Address: 5200 NW 108th Avenue  
Sunrise, FL 33351  
Voice: (954) 577-4455  
Fax: (954) 929-5560  
Toll free: (800) 762-1084

#### **Technical Support**

Voice: (954) 577-4455 (Press 4)  
Fax: (954) 756-8015  
Email: [tech@chauvetlighting.com](mailto:tech@chauvetlighting.com)

**World Wide Web** [www.chauvetlighting.com](http://www.chauvetlighting.com)

### **UNITED KINGDOM AND IRELAND - Chauvet Europe Ltd.**

#### **General Information**

Address: Unit 1C  
Brookhill Road Industrial Estate  
Pinxton, Nottingham, UK  
NG16 6NT  
Voice: +44 (0)1773 511115  
Fax: +44 (0)1773 511110

#### **Technical Support**

Email: [uktech@chauvetlighting.com](mailto:uktech@chauvetlighting.com)

**World Wide Web** [www.chauvetlighting.co.uk](http://www.chauvetlighting.co.uk)

### **MEXICO - Chauvet Mexico**

#### **General Information**

Address: Av. Santa Ana 30  
Parque Industrial Lerma  
Lerma, Mexico C.P. 52000  
Voice: +52 (728) 285-5000

#### **Technical Support**

Email: [servicio@chauvet.com.mx](mailto:servicio@chauvet.com.mx)

**World Wide Web** [www.chauvet.com.mx](http://www.chauvet.com.mx)

### **CHAUVET EUROPE - Chauvet Europe BVBA**

#### **General Information**

Address: Stokstraat 18  
9770 Kruishoutem  
Belgium  
Voice: +32 9 388 93 97

#### **Technical Support**

Email: [Eutech@chauvetlighting.eu](mailto:Eutech@chauvetlighting.eu)

**World Wide Web** [www.chauvetlighting.eu](http://www.chauvetlighting.eu)

Outside the U.S., United Kingdom, Ireland, Mexico, or Benelux contact the dealer of record. Follow their instructions to request support or to return a product. Visit our website for contact details.